


# Retrofit guide.

From CFCs to HCFCs to HFCs – refrigeration.

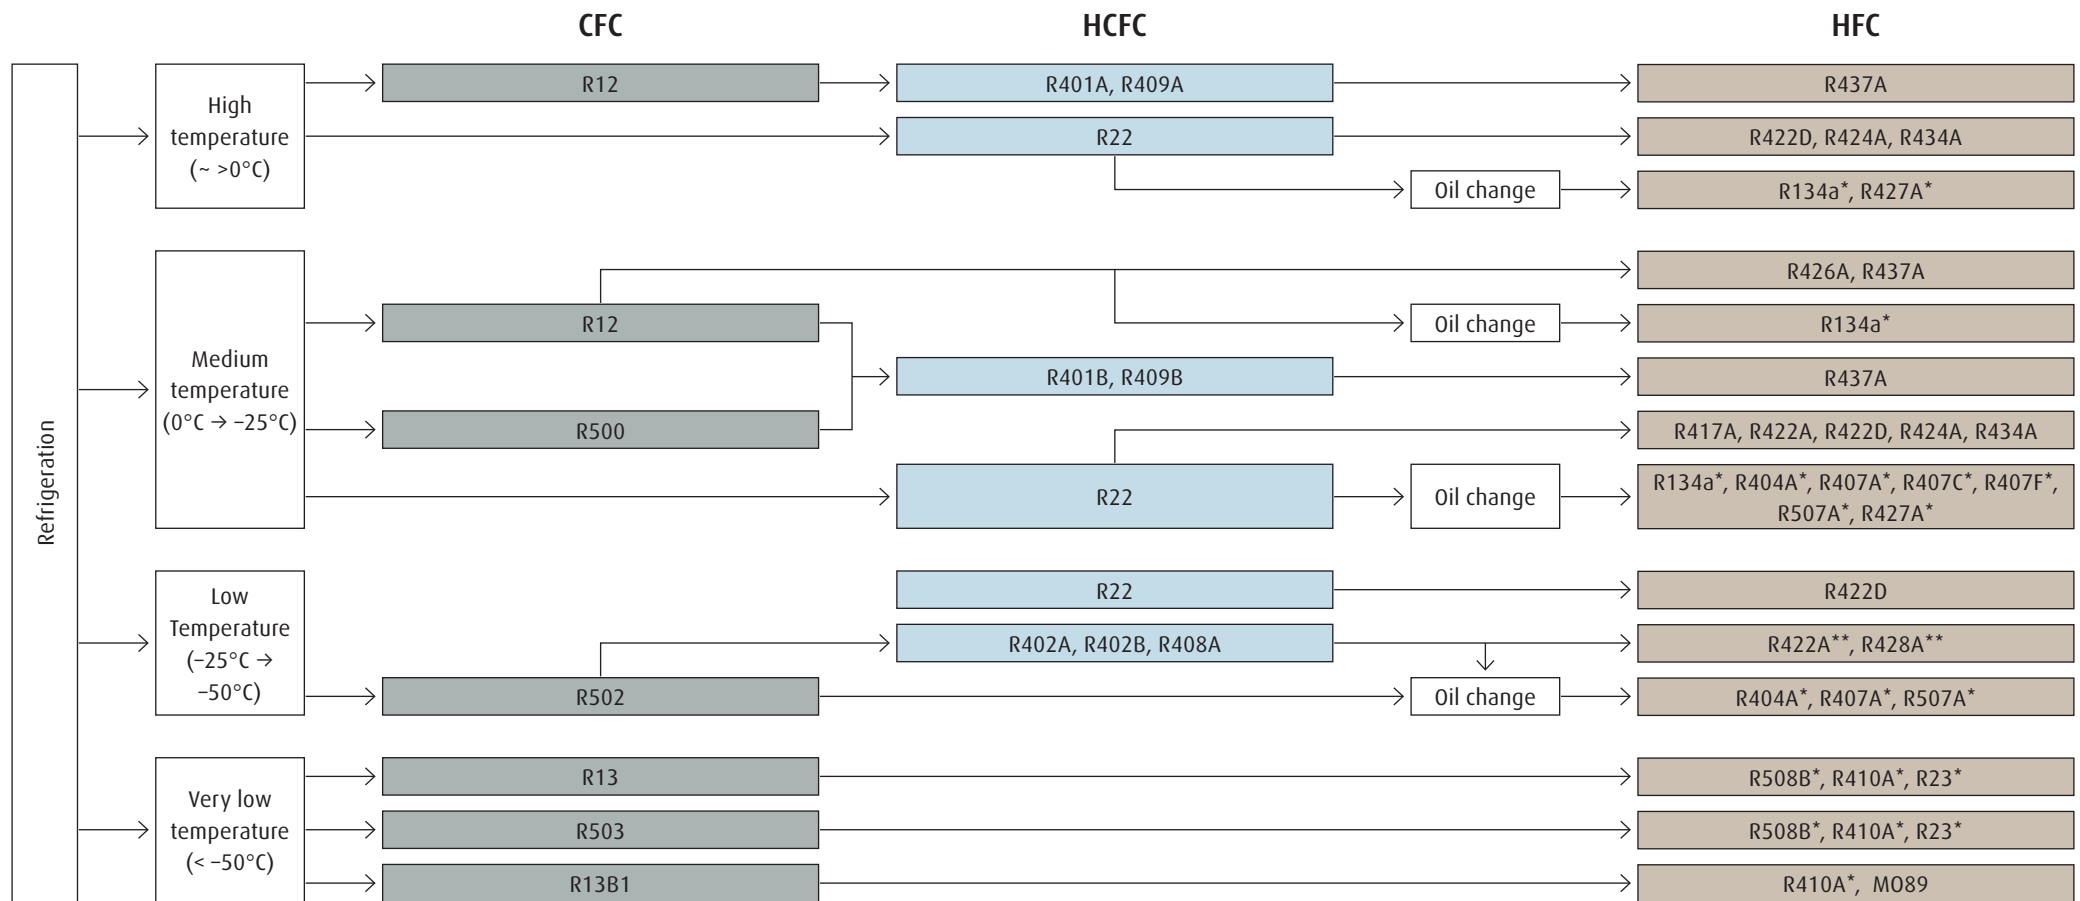

\*polyol ester oil (POE) must be used

\*\*R422A and R428A are retrofit gases for R502 and will require systems to be suitable for R502 pressures and an expansion device suitable for R404A


The information is provided for guidance only. We make no warranties, expressed or implied, and assume no liability in connection with any use of this information. For further support please contact your local Linde supplier.

Linde AG

Gases Division, Seitnerstrasse 70, 82049 Pullach, Germany, Phone +49.89.7446-2399, Fax +49.89.7446-2071, refrigerants@linde-gas.com, www.linde-gas.com/refrigerants

# Retrofit guide.

From CFCs to HCFCs to HFCs – air conditioning.

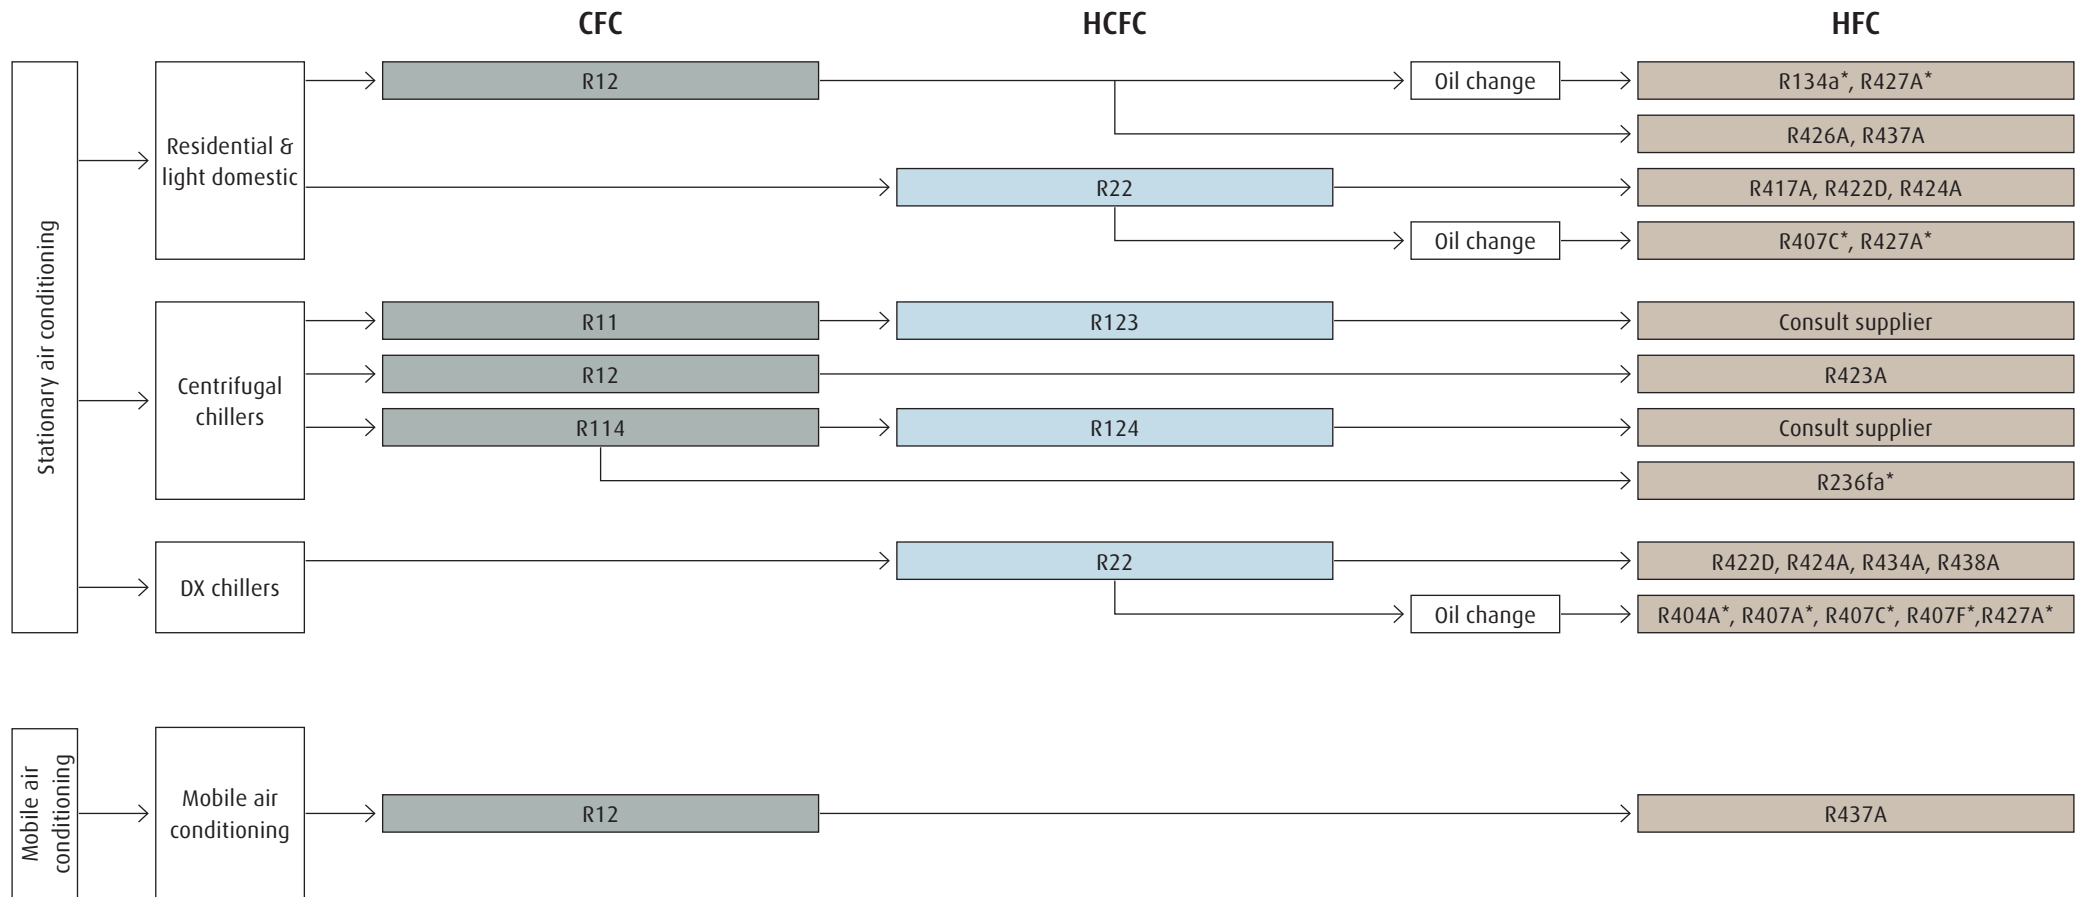


\*polyol ester oil (POE) must be used  
 The information is provided for guidance only. We make no warranties, expressed or implied, and assume no liability in connection with any use of this information. For further support please contact your local Linde supplier.

Linde AG

Gases Division, Seitnerstrasse 70, 82049 Pullach, Germany, Phone +49.89.7446-2399, Fax +49.89.7446-2071, refrigerants@linde-gas.com, www.linde-gas.com/refrigerants

# Retrofit guide.

From HCFCs to HFCs.

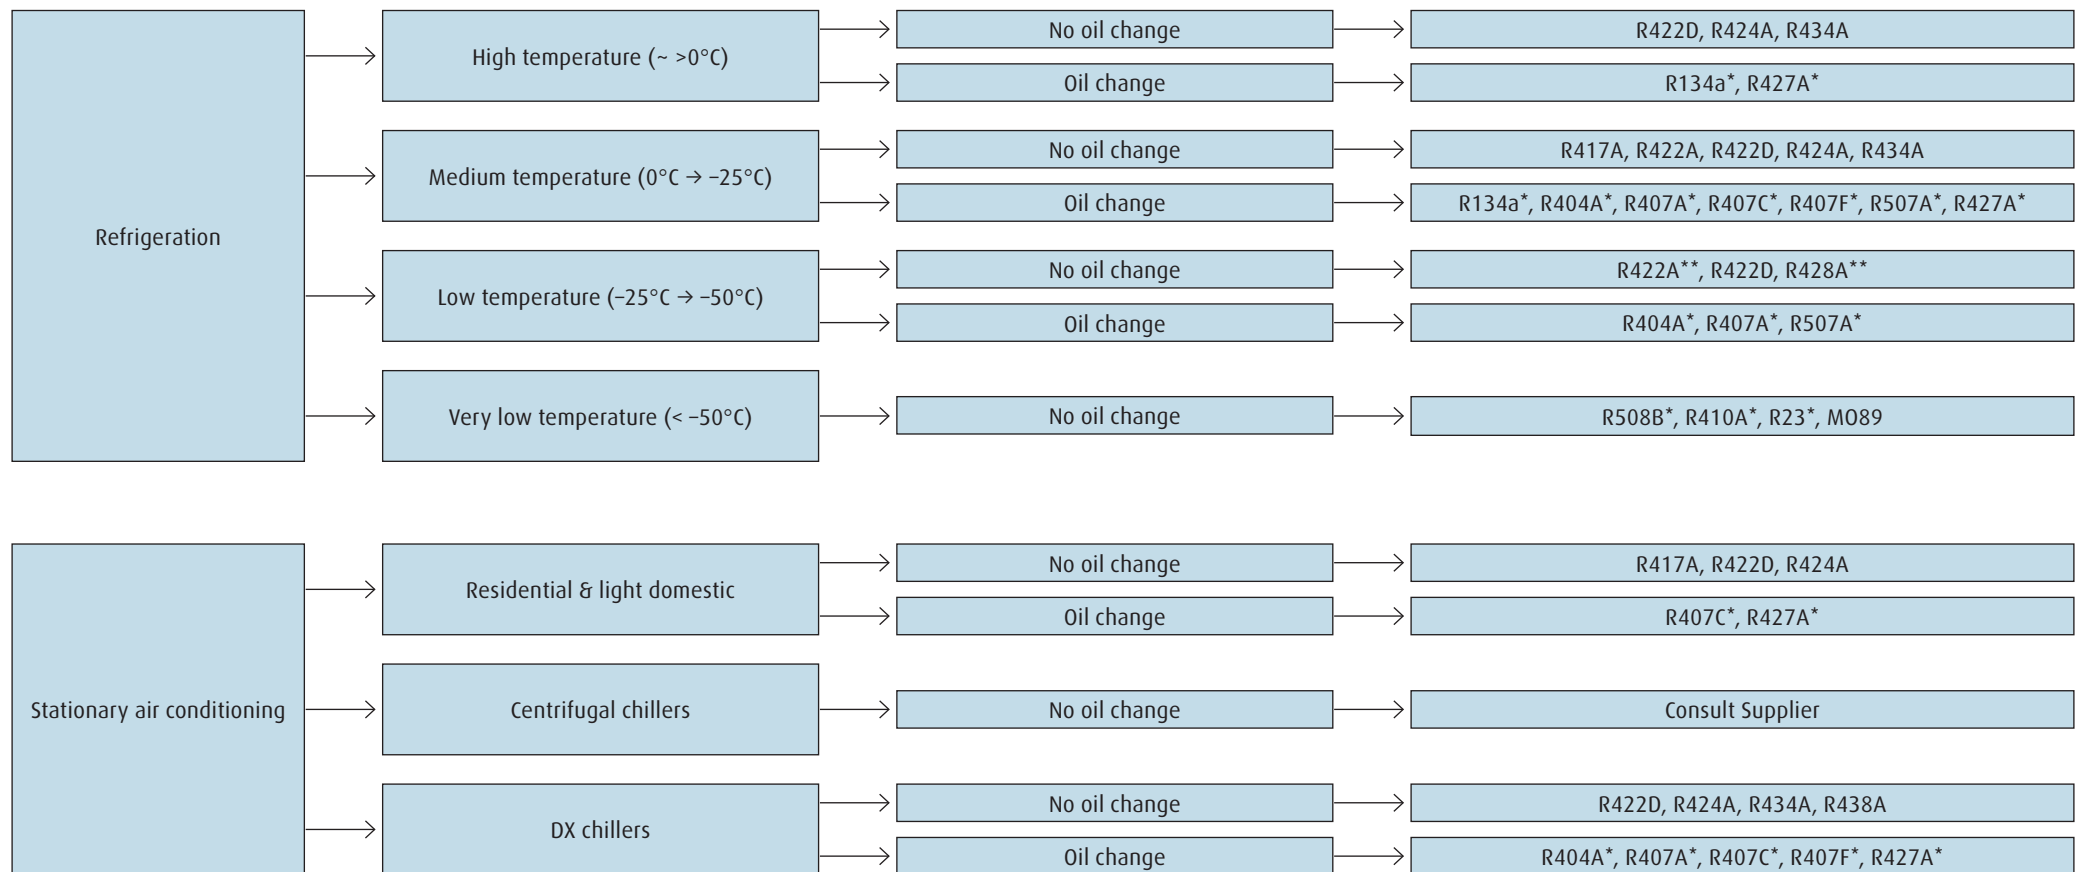

\*polyol ester oil (POE) must be used

\*\*R422A and R428A are retrofit gases for R502 and will require systems to be suitable for R502 pressures and an expansion device suitable for R404A

The information is provided for guidance only. We make no warranties, expressed or implied, and assume no liability in connection with any use of this information. For further support please contact your local Linde supplier.

Linde AG

Gases Division, Seitnerstrasse 70, 82049 Pullach, Germany, Phone +49.89.7446-2399, Fax +49.89.7446-2071, refrigerants@linde-gas.com, www.linde-gas.com/refrigerants